
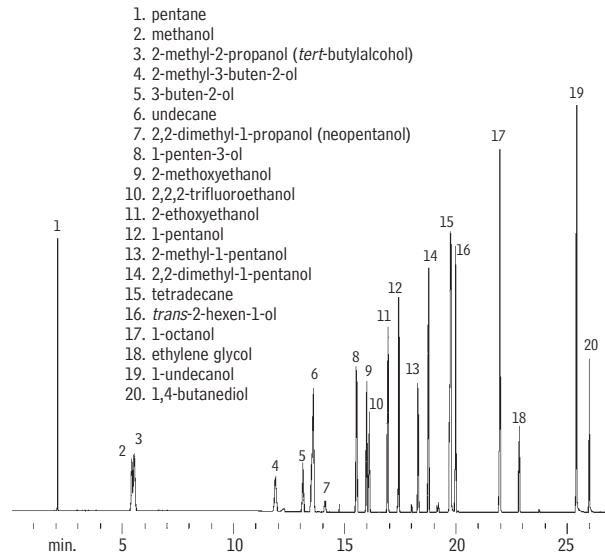


Alcohols Stabilwax®

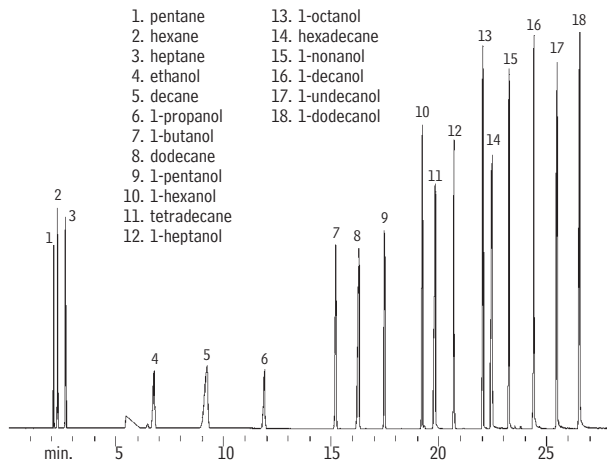

GC_CH00288

60m, 0.53mm ID, 1.0 μ m Stabilwax® (cat.# 10658)
1.0 μ L split injection of alcohols

Oven temp.: 45°C (hold 10 min.) to 250°C
@ 12°C/min. (hold 20 min.)
Inj. & det. temp.: 250°C
Det.: MS
Carrier gas: helium
Linear velocity: 51cm/sec. set @ 50°C
Split ratio: 8:1
Ionization: EI