


# Hexamethylenediamine Stabilwax®-DB

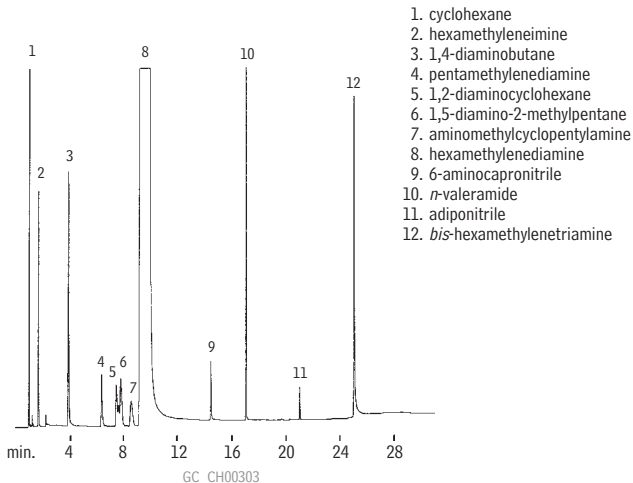

30m, 0.53mm ID, 0.5 $\mu$ m Stabilwax®-DB (cat.# 10840)  
0.2 $\mu$ L direct injection of a neat hexamethylenediamine sample onto  
a Uniliner® liner

Oven temp.: 95°C (hold 6 min.) to 235°C @  
7°C/min. (hold 2 min.)  
Inj. & det. temp.: 255°C  
Carrier gas: hydrogen  
Linear velocity: 40cm/sec. (flow rate: 5cc/min.)  
FID sensitivity: 64 x 10<sup>11</sup> AFS