


Freon® & Ethylene Oxide Rtx®-200

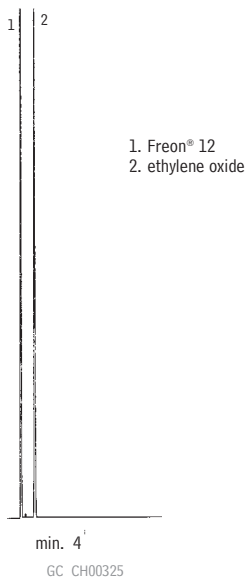

30m, 0.53mm ID, 3.0 μ m Rtx®-200 (cat.# 15085)
50 μ L direct injection of Freon® 12 and ETO

Oven temp.: 25°C
Inj. & det. temp.: 290°C
Carrier gas: hydrogen
Linear velocity: 40cm/sec. (flow rate: 5.2cc/min.)